

Restraint systems for child occupants of motor vehicles

KRE-HS1813

Generic class

Suitable for infants of 0 ~ 13 kg



KRE-HS1813

Child car seat

Product instruction manual


- Please read this manual carefully before using this product. If you do not follow this manual, it may affect the safety of children.
- Please keep the instructions properly for future reference.
- This product is suitable for children of 0 ~ 13 kg (about 0 ~ 18 months).
- This product must be installed in the backward direction when it is used.

Warning

- This product is a "universal" child restraint system (hereinafter referred to as safety seat), which conforms to GB27887-2011. Use child restraint systems that fit most, but not all, car seats.
- It is easier to achieve the correct match if the vehicle manufacturer specifies in the user's manual that a "universal" child restraint system for this age can be matched.
- If in doubt, consult the child restraint manufacturer or retailer. This child restraint system must be installed and used in the backward direction, and cannot be installed in the middle. In a car seat with an airbag.
- Please read the instructions carefully and keep it for future reference until the product is discarded. If you give this product to someone else, please be sure to attach this manual. Otherwise, there will be a safety hazard that will put your child at risk
- Important! Please carefully read the instructions in this manual and the relevant safety seat instructions in the vehicle manual. Please install and use the seat according to this manual. Failure to follow the instructions may result in serious injury and death to the child.
- Do not attempt to remove the safety seat label. The label contains important information.
- Do not use safety seats with damaged or missing parts.
- Do not use damaged or worn child seat belts or car seat belts.
- It is forbidden to use second-hand safety seats of unknown origin.
- It is forbidden to install this product with a two-point automobile safety belt.
- Do not allow children to play or adjust this safety seat. Check whether the safety belt is properly fastened every time you use it.
- Do not attempt to modify this safety seat in any way.
- Do not attempt to disassemble this safety seat unless instructed.
- Do not use a safety seat that has been involved in a crash. A crash can result in invisible damage to the safety seat.
- Applicable only when the applicable vehicle type is equipped with 3-point safety belt required by GB 14166 or ECE R16.

- Please install the product correctly according to the instructions, confirm that the parts of the product are assembled or placed correctly, and ensure that the product is not stuck by the movable seat or door in the vehicle during normal use.
- See this manual for details on how the rigid and plastic parts of the safety seat should be placed or installed.
- It shall not be installed at the position where the airbag is installed.
- Each strap of child restraint that is attached to the vehicle shall be fastened, and the strap of child restraint shall be adjusted to the body of the child without twisting.
- Ensure that the waistband can well restrain the pelvis when being worn. Make sure the seat belt is lowered when worn and the child's pelvis is firmly restrained. (When applicable).
- The safety seat should be replaced after a severe accident.
- Uncertified and modified products are dangerous, as are products without installation instructions provided by the manufacturer.
- Keep out of the sun, or the seat surface may burn the child's skin. Do not place a child in a safety seat unattended.
- Luggage and articles that are likely to cause injury in a collision should be properly placed.
- Safety seats without face covers cannot be used.
- Materials other than those recommended by the manufacturer shall not be used for the safety seat cover. The cover material affects the overall performance of the safety seat.
- Do not use any force points other than those indicated.
- Do not use this product in a side-facing or rear-facing vehicle seat. (Figure 1A, 1b). Use this product only on forward-facing vehicle seats.
- Accident statistics show that children are safer in the back seats than in the front seats. (Figure 1C, 1 d)
- This product is intended for use as a car seat only and should not be used outside the vehicle.
- Do not allow children to play or adjust this safety seat, each time it is used.
- Check whether the safety belt is fastened and the locking mechanism is in a reliable locking state.


- The instructions should be placed in the car seat for easy reference at any time. This product does not have the installation instructions provided by the manufacturer, which is very dangerous. Please contact the manufacturer.
- Do not use installation methods not shown in this manual. If you have any questions, please contact the safety seat manufacturer.
- The safety seat must be secured even when not in use. Unsecured safety seats may injure other passengers in a crash or during braking. Make sure that loose items, such as luggage, books, etc., which may cause injury in an accident, are properly secured.
- When the car is running, do not take the child out of the safety seat.
- This product is intended for adult installation and adjustment only.

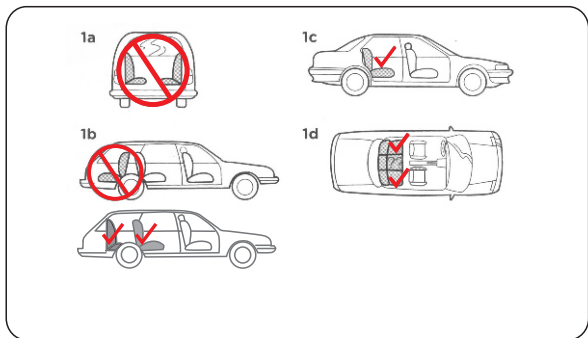

Backrest option a:

Only for seats equipped with 3-point vehicle seat belts (1 d), do not use 2-point vehicle seat belt mounting product


Name of the part

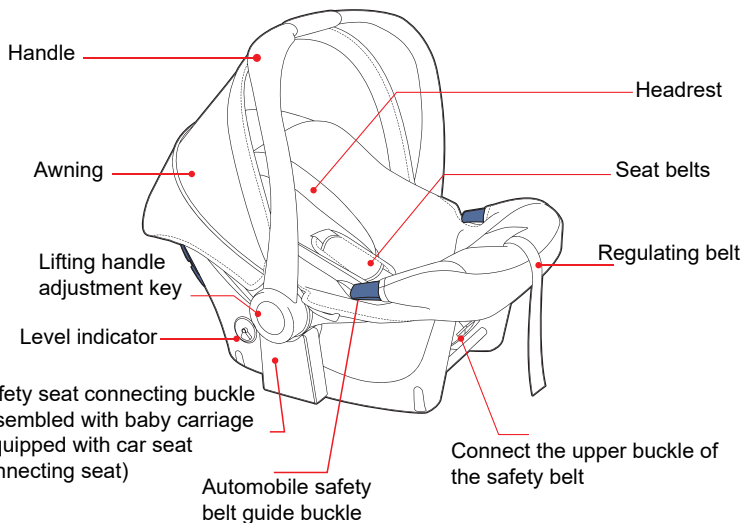

Baby carriage assemble by safety seat


Removal handle of safety seat

Shoulder strap adjustment hole

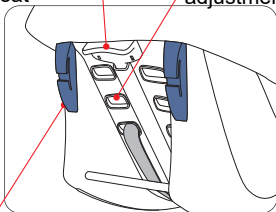


Automobile safety belt guide buckle

Adjust the belt release button

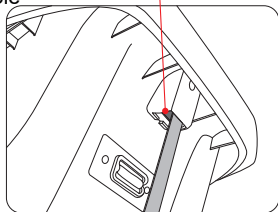


Handle adjustment

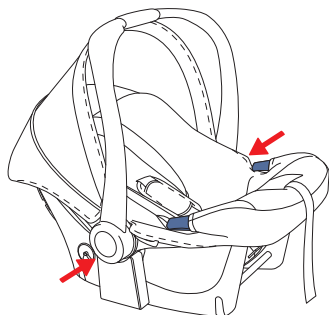

Angle adjustment of lifting handle


Press the lifting handle adjustment button at the same time to adjust the lifting handle angle in multiple gears.

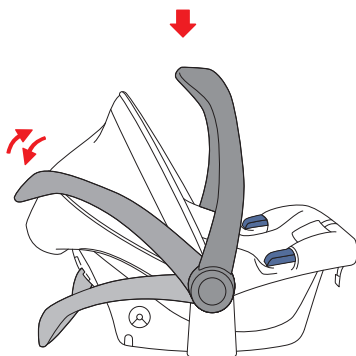


Use of awnings

The function of the awning is to prevent the light from shining on the child's face. You can choose to use or not to use the awning according to the situation.

1) When the awning is not in use, press down the two snaps at D, and then pull the awning from C to B or A and arrange it.

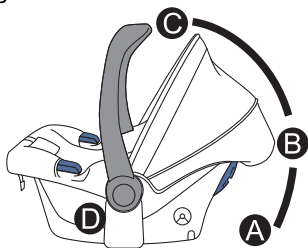

2) When using the awning: 1. When the basket is in the cradle state, just adjust the handle from B to C. 2. When the basket is in the balanced state, if you need to adjust the handle from A to C (through B), the handle of the basket may not be able to be pulled up, just pull the awning up by hand.

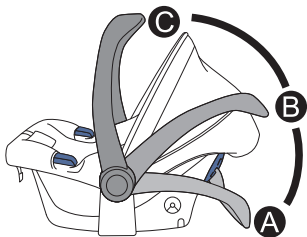


Baby's fixation and precautions

Adjustment of Y-belt

Length adjustment method

Loosening: Press the adjuster button (E in the figure) while pulling the shoulder strap (F in the figure) outward.

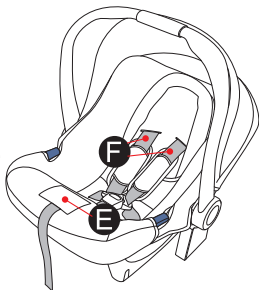

Warning: Do not pull on the shoulder sheath.

Tighten: Pull the adjusting strap outward.




Baby's fixation and precautions


Adjustment of Y-belt

Position adjustment method


1) Range of position adjustment: As the baby's height and weight increase, you can remove the safety belt from the three-way plate G (the back of the safety seat), adjust it from the J slot to the H slot, and ensure that it is connected with the three-way plate.



2) Position adjustment standard: ensure that the shoulder strap is flat and slightly lower than the baby's shoulder.

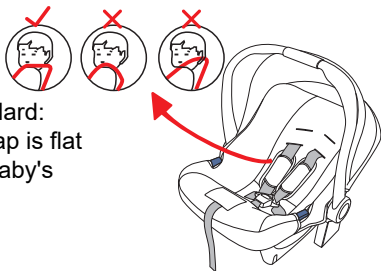

3) Disassembly of Y-shaped belt: adjust the Y-shaped belt to the loosest state, untie the shoulder belt from the three-way plate on the back of the seat, and pull out the corresponding shoulder belt from the shoulder belt perforation slot from the front of the seat.



Baby's fixation and precautions

Adjustment of Y-belt


4) Installation of Y-shaped strap: put the shoulder strap through the shoulder strap perforation slot and connect it with the three-way plate.

Warning: Make sure that the shoulder belt can fully pass through the shoulder belt perforation slot, and make sure that the safety belt is flat and free from twisting and knotting.



The baby's fixation

1) Loosen the Y-shaped belt and put the safety seat on the ground. Upper, adjust the handle to the balance position. Adjust the seat belt to the loosest position. Press the button on the safety buckle to release the safety belt.

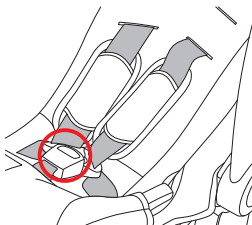

2) Fix the baby, put the baby into the child car seat, and gently put the shoulder strap on the baby's shoulder.




Warning: Do not allow straps to cross or twist.

Baby's fixation and precautions


Adjustment of Y-belt

3) When locking the safety belt, close the two bolts of the safety buckle and insert them into the socket of the safety buckle. If a "click" sound is heard, it indicates that the connection is tight.

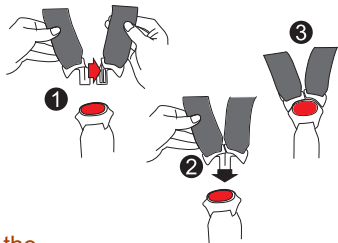


Warning: The correct position of the safety buckle is on the baby's crotch, not on the abdomen.

4) Tighten the Y-shaped belt by pulling the adjusting belt in the direction indicated by the arrow until the safety belt is adjusted to the extent that two fingers can be inserted into the chest.

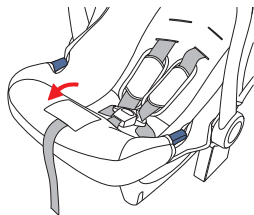


Installed in the vehicle

1) Adjust the handle of the seat where the baby is fixed to the installation and carrying position with its back to the driving direction, and place the safety seat on the rear seat of the car smoothly.

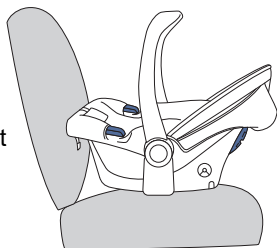

2) Pull out the car safety belt from the upper part of the baby's legs, insert the car safety belt buckle, and make the waist belt pass through the blue waist belt guide grooves on both sides.

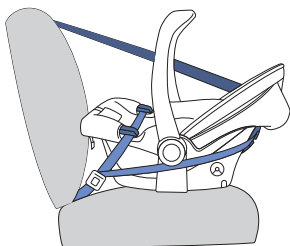


Warning:

Make sure that the safety belt is free from twisting, slipping, etc.

Installed in the vehicle

3) Pull the shoulder belt around the seat (part K circled in red) and through the shoulder belt guide slot.


Warning: Make sure that the safety belt is not twisted or slipped.

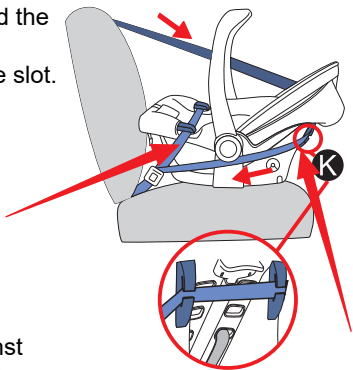

4) Tighten the safety belt against the safety seat. Pull the shoulder belt of the automobile safety belt closer to the buckle to tighten the waist belt. Pull the upper portion of the shoulder strap of the vehicle harness to fasten the entire vehicle harness.

Warning: Make sure the car is child safe and the seat is securely fastened.

WARNING: Baggage and articles that may cause injury in a collision should be properly stowed.

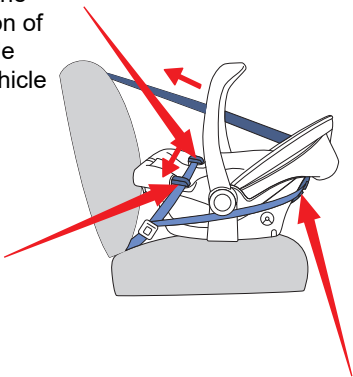


Disassembly and assembly of cloth cover


Disassembly of cloth cover

Warning: For safety reasons, we do not recommend frequent disassembly and assembly of the cloth cover.

1) Unfasten the safety belt buckle.




2) In the direction of the arrow. Turn up the two pieces of plastic shown in the figure.

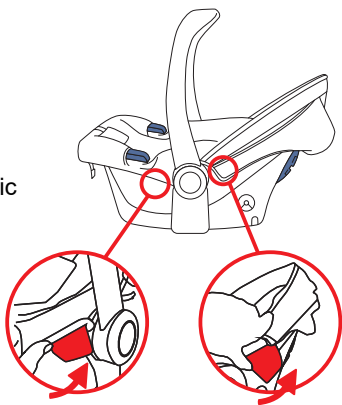


Disassembly and assembly of cloth cover

Disassembly of cloth cover

3) Pull up the front cloth cover (in the direction indicated by the arrow) and pull out all the cloth covers.

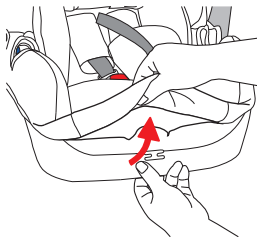


4) Pull the cloth cover on the top of the basket upward (in the direction of the arrow) to remove the cloth cover.

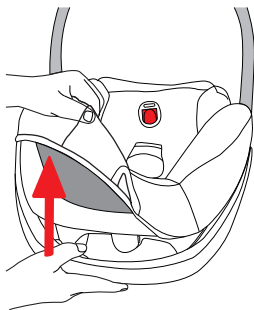


Disassembly and assembly of cloth cover

Installation of cloth cover


1) Place the cloth sleeve on the shell, pass the straddle through the straddle hole, and install the straddle protective sleeve.



2) Put the shoulder strap through the shoulder strap hole of the cloth cover.




3) Pass the adjusting belt through the adjusting belt outlet.




Disassembly and assembly of cloth cover

Installation of cloth cover


4) Pull down the cloth cover (the direction of the arrow) to fix the edge of the cloth cover to the edge of the seat.



5) Turn to the top of the basket, operate as above, and pull the cloth cover.



6) Press the cloth cover in the direction of the arrow and fix the left and right plastic hooks.



Warning: Please keep away from sunlight, or the seat surface will burn the skin of children.

Warning: The safety seat shall be fixed on the seat when it is not used in the vehicle. Go, or put it in the trunk.



Installation position




1. This product is only applicable to vehicles equipped with 3-point safety belts that have passed the requirements of GB14166 or ECE R16, and can only be placed on the front-facing seats in the rear row of the vehicle.


2. The car seat is installed in a position equipped with a regular seat belt and without an airbag.

3. The orientation of the car seat installation is to face the rear of the car.


Safety precautions

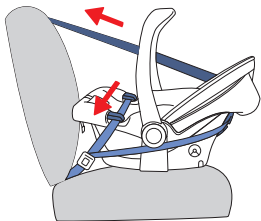

Tighten the shoulder strap of the car seat belt.

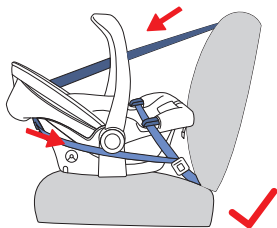


As shown in the figure, the final installation is completed.

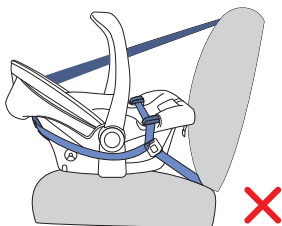

Warning:

The car safety belt must be clamped into the car safety belt hook of the safety seat. The safety belt buckle of some vehicles is very high. When installing, the buckle may be connected. Touching the belt hole of the safety seat, this installation situation will be very dangerous. If this is the case, install the safety seat on another vehicle seat. If in doubt, contact the safety seat manufacturer or dealer.

Instructions placement

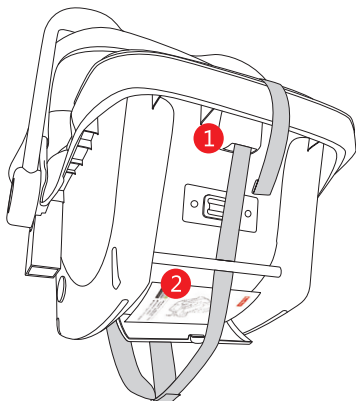

After reading this manual, please place the manual as shown in the figure above for future reference.

1. Press and hold the adjusting belt release button and pull out a little webbing.
2. Place the manual in the slot as shown in Figure 2.

Instructions for use

Periodically check for worn or damaged parts. Do not use if parts are found to be damaged.

Cloth cover

The cloth cover can be washed with warm water and clean water with water temperature not exceeding 30 degrees Celsius, and then dried naturally.

Hand wash at 30 ° C

Use a neutral detergent

Do not iron, dry clean, bleach, dry dry

Keep away from heat

Do not use bleach or furniture cleaner



Buckle

Food, drink or other debris may be trapped in the clasp.

Wash with warm water. A "click" sound may be heard when the buckle is functioning properly.

Wipe the safety belt and plastic parts with warm water and neutral soap.

About the cloth cover:

Do not use the product after removing the cloth cover

The cloth cover can be removed and washed, but we do not recommend that you remove the cloth cover frequently. Once you have unpacked and washed the cloth cover, be sure to reinstall it in its original configuration and make sure that no parts are missing or incorrectly installed

Do not use any cleaning agents, solvents, or strong soaps.

Do not add any lubricants or other chemicals to the seat belt system

Shoulder pads and hip pads should be washed by hand at a temperature below 30 degrees, laid flat and dried. Do not dry clean or dry in a rotary drum, and keep away from strong light.

